

## MONITOR TOWERS

Model AG-TPF

Fixed monitor tower



### PRODUCT DESCRIPTION

The monitor tower model AG-TPF from AG Fire Sprinkler is a fire-fighting equipment and supporting the use of artillery fire. Its structure strictly relevant standard design, security and stability, and it has security measures and spray cooling measures.

The operator will place in the fixed platform, where he will direct the monitor, in order to extinguish the fire.


### TECHNICAL DATA

<b>Model</b>	AG-TPF
<b>Working pressure</b>	175 psi (12 bar)
<b>Design pressure</b>	232 psi (16 bar)
<b>Maximum wind speed</b>	130 km/h
<b>Indicative weight for 10 m tower</b>	1800 kg
<b>Material</b>	Carbon steel
<b>Finish</b>	Red RAL 3000 painted
<b>Optional</b>	Different size tower Other finished available under request Cooling system

### COMPONENTS

ITEM	DESCRIPTION
1	Fixed platform
2	Safety protection
3	Access ladder

4	Cooling system
5	Load-bearing pipe
6	Cooling system cut-off valve
7	Supply

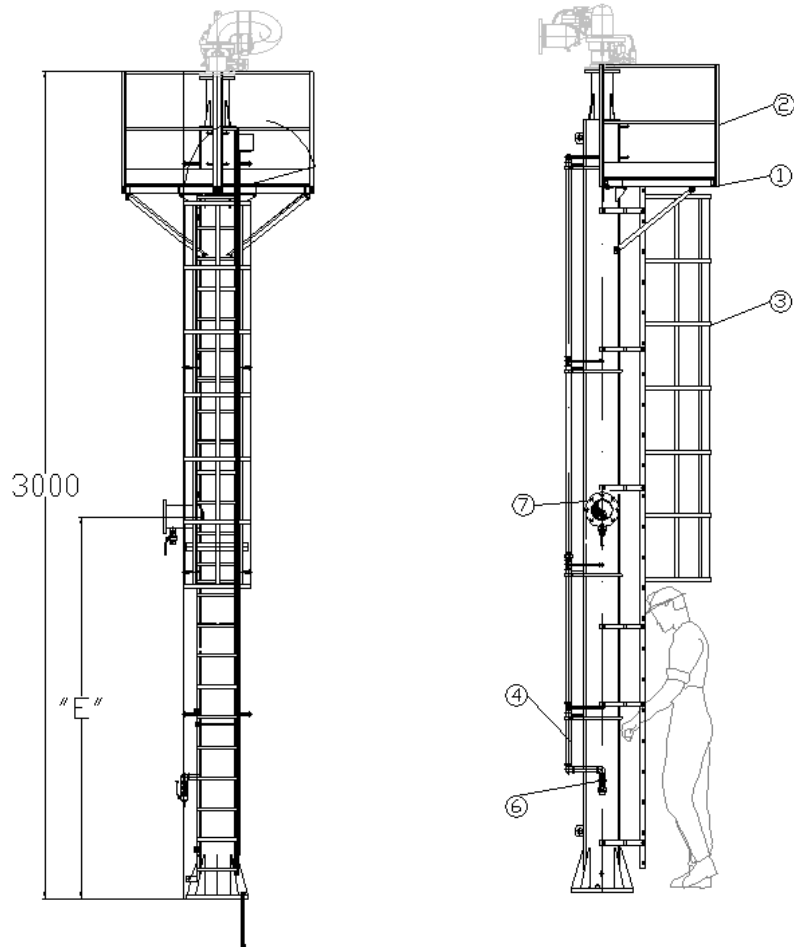

Dimensions in mm

### ORDERING INFORMATION

PLATFORM	CODE
FIXED	AG-TPF

Specify:

Model	
Quantity	
Flanges diameter	
Cooling system	
Tower high	
Type of supply valve	
Finish	

The equipment presented in this data sheet is to be installed in accordance with the latest published Standards of the national fire protection association (NFPA), FM Global, LPCB, VdS or other similar organizations, also with the provisions of governmental codes or ordinances whenever applicable.  
This documentation is not contractual. AG Fire Sprinkler reserves the right to any kind of change without notice.